

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
29 March 2001 (29.03.2001)

PCT

(10) International Publication Number  
**WO 01/22022 A1**

(51) International Patent Classification<sup>7</sup>: **F41A 9/42**  
// 9/06, 9/38

Kent [SE/SE]; Blinäs 8083, S-691 93 Karlskoga (SE). EN-  
GSTRÖM, Sven-Erik [SE/SE]; Skogsrundan 9A, S-691  
43 Karlskoga (SE). HALLQVIST, Sten [SE/SE]; Ruda  
Skedevi, S-643 94 Vingåker (SE). SANDBERG, Torbjörn  
[SE/SE]; Triogatan 10, S-656 36 Karlstad (SE).

(21) International Application Number: **PCT/SE00/01819**

(22) International Filing Date:  
20 September 2000 (20.09.2000)

(74) Agent: **FALK, Bengt**; Bofors Support AB, Patents and  
Trademarks, S-691 80 Karlskoga (SE).

(25) Filing Language: **English**

(81) Designated States (*national*): **IL, US, ZA.**

(26) Publication Language: **English**

(84) Designated States (*regional*): European patent (AT, BE,  
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,  
NL, PT, SE).

(30) Priority Data:  
9903440-7 23 September 1999 (23.09.1999) **SE**

(71) Applicant (*for all designated States except US*): **BOFORS  
WEAPON SYSTEMS AB** [SE/SE]; S-691 80 Karlskoga  
(SE).


Published:  
— *With international search report.*

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **STÅLHANDSKE,**

*For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.*

(54) Title: **METHOD AND ARRANGEMENT FOR LOADING ARTILLERY PIECES BY MEANS OF FLICK RAMMING**

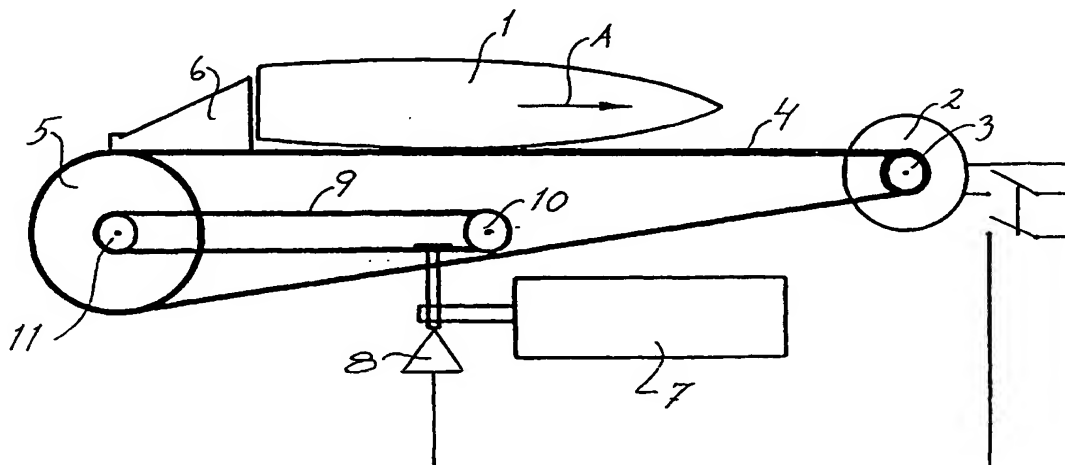

(57) Abstract: The present invention relates to a method and an arrangement for flick ramming shells (1) and the propellant powder charges in artillery pieces which are loaded with these components separately. The invention therefore comprises both a method and an arrangement and it is characterized above all in that the respective component (1) is accelerated to the necessary ramming velocity using an electromechanically generated energy supply in the form of starting acceleration from an electric motor (2), the rotating starting acceleration of which is mechanically converted into rectilinear acceleration and the energy supply from which can, if required, be supplemented with the energy supply from a previously charged energy accumulator (7, 37a) which is triggered simultaneously with the start of the electric motor.

WO 01/22022 A1